


OPTIONAL SPACER PLATE BEARS ON PANEL OSB - THICKNESS AND SHAPE CAN VARY - USED TO ADJUST CEILING HEIGHT AND TO PROVIDE PITCHED ROOF BEARING.

2x LUMBER TOP PLATE

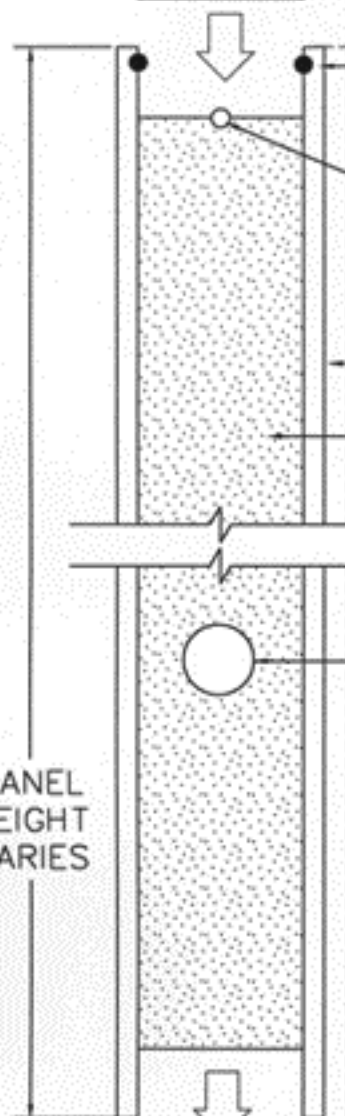

CAULK - CONTINUOUS BEAD - WOOD-TO-WOOD CONNECTIONS - TYP.

FOAM SEALANT - CONTINUOUS BEAD EPS-TO-WOOD SEAL - TYP.

7/16" OSB - TYP.

EPS FOAM

WIRE CHASE - AS REQUIRED

A THERMAL BARRIER OF 1/2" DRYWALL, OR EQUIVALENT, IS REQUIRED ON ALL INTERIOR SIP SURFACES.

PANEL HEIGHT VARIES

FOAM SEALANT - CONTINUOUS BEAD EPS TO WOOD

CAULK - CONTINUOUS BEAD WOOD-TO-WOOD CONNECTIONS - TYP.

2x LUMBER SILL PLATE

OPTIONAL SECOND SILL PLATE - FULL WIDTH OF PANEL

VERTICAL SECTION  
(WALL) PANEL

STRUCTURAL INSULATED PANEL  
INSTALLATION GUIDE

TITLE

"TYPE A" STRUCTURAL  
INSULATED PANEL (SIP)

**PORTER**  
STRUCTURAL INSULATED PANELS

M. H. PORTER, INC. 4240 N. 136th AVE HOLLAND, MI 49424 (616) 399-1983  
11/02

38-001